

Polyhydroxyalkanoates and phosphorus recovery at pilot scale through the SCEPPHAR system

Nicola Frison¹, Vincenzo Conca¹, Cinzia Da Ros¹, Anna Laura Eusebi², Francesco Fatone²

¹Department of Biotechnology, University of Verona, Strada Le Grazie 15, I-37134, Verona – Italy

²Department of Science and Environmental Engineering (SIMAU), Marche Polytechnic University, Breccie Bianche St., 60131, Ancona, Italy (VE) – Italy.

Keywords: Short-Cut Enhanced Phosphorus and PHA Recovery (SCEPPHAR), PHA, biological nitrogen removal; Horizon 2020 – Smart-Plant

Presenting author email: nicola.frison@univ.it

During the last decades, high attention has been given to the treatment of municipal wastewater, especially to which concern resource recovery and carbon footprint. Within the WWTPs, when the anaerobic digestion is accomplished, the usual practice is to return back in the main wastewater treatment line the anaerobic supernatant after the dewatering of the digestate. Although this liquid stream represents a small percentage of influent flow, it may increase significantly (15-25%) the nitrogen (N) and phosphorus (P) load (Malamis et al., 2013). Recently, several short-cut processes have been developed for the via-nitrite nitrogen removal from sludge reject water, including the complete autotrophic nitrogen removal which represents certainly an attractive alternative for both process performance and low energy requirements (Malamis et al., 2013). On the other hand, Frison et al. (2015) accomplished the ammonia oxidation to nitrite followed by the selection of PHAs-storing bacteria through aerobic-feast and anoxic-famine conditions in two Sequencing Batch Reactors (SBRs). This process scheme was replicated at pilot scale during the Horizon 2020 Smart-Plant Innovation Action, which aims the recovery of resources by the treatment of municipal wastewater and create the link between water utility and chemical industries. The aim of the current study is to validate at pilot scale the above-mentioned system, with the implementation of phosphorus recovery by struvite precipitation, which has been named Short-Cut Enhanced Phosphorus and PHA Recovery (S.C.E.P.P.H.A.R.). The process sustainability is improved by organic matter recovery through wastewater sieving and subsequent fermentation of the cellulosic primary sludge for high rate VFAs production. The SCEPPHAR system (Figure 1) was installed at pilot scale within the WWTP of Carbonera (Treviso, North of Italy). The latter, serves 40,000 person equivalents (PE), and treats up to 15,000 m³/d of municipal wastewater derived from a combined sewer system.

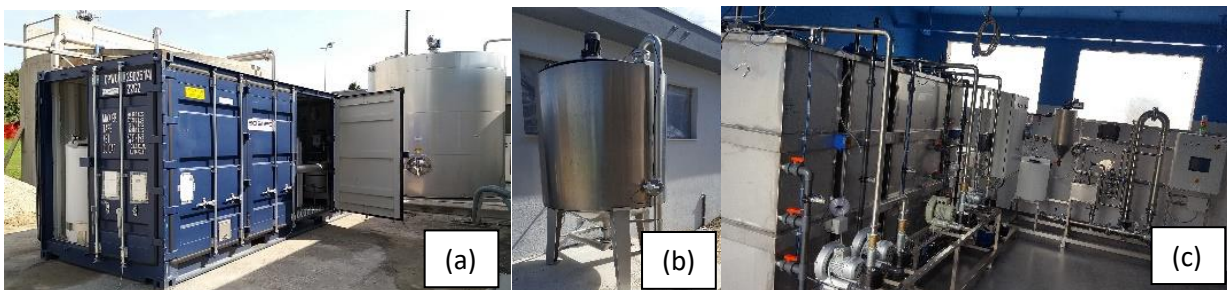


Figure 2a) SF1000 Salsnes Filter; b) Fermentation unit; c) Membrane, crystallizer, Nitritation SBR, Selection SBR, Accumulation SBR)

The main steps involved in the SCEPPHAR system involved the following units:

- 1) Pre-concentration of municipal wastewater through the sieving at 350 μm and recovery of cellulosic primary sludge (CPS) accomplished by a rotating belt dynamic filter (RBDF) (type SF1000 Salsnes Filter, Norway);
- 2) Controlled fermentation of CPS at 37°C in a sequencing batch fermentation reactor (SBFR) with a working volume 2.6 m³ for the production of VFAs. The fermentation liquid containing VFAs was recovered by a solid/liquid separation using a ceramic membrane;
- 3) Struvite crystallizer with a working volume of 50 liters where Mg(OH)₂ is added to favor the crystallization;
- 4) Ammonia oxidation via-nitrite from the anaerobic supernatant in sequencing batch reactor (N-SBR) with 1.5 m³ of working volume. The SRT was maintained at 15-20 days;
- 5) Selection of PHA storing biomass by feast/famine regime in a Sequencing Batch Reactor (S-SBR) under aerobic/anoxic conditions in a 2.9 m³ of working volume. The applied SRT was maintained at around 5 days;
- 6) PHA accumulation in the biomass-cells was carried out in a SBR with a 1 m³ of working volume, where up to 5-8 pulse-addition of VFAs were accomplished in 5-6 hours.

Table 1. Operating conditions of the SBRs for the nitrification, selection and accumulation

Parameter	Nitrification SBR	Selection SBR	Accumulation SBR
Type of Carbon source	-	Liquid fraction of fermented CPS	Liquid fraction of fermented CPS
Electron acceptor	Oxygen	Oxygen (feast)/Nitrite(famine)	Oxygen
Applied vNLR (kgN/m ³ d)	1.5-1.7	0.55-0.65	-
tOLR(kgCOD/m ³ d)	-	1.2-1.4	5-8 spikes of 1 gCOD/L of VFAs from fermentation liquid
Food/Microorganism (gCOD-VFA/gMLVSS)	-	1.16 ± 0.25	-
Sludge Retention Time (d)	15-18	5-8	-

Preliminary results shows that RBDF produced 650-720 liters in 9 hours of cellulosic primary sludge (CPS) with a total solid content of 5% by the sieving of 40 m³/h of raw wastewater.

Around 95-100 mgTSS/L were removed from the wastewater without the addition of polyelectrolyte, which corresponded at around 50% of the suspended solids and 30% of COD influent.

Every day, the cellulosic primary sludge was fed into the fermentation unit. The mesophilic fermenting conditions lead to VFAs concentration of 10-15 gCOD/L with a specific yield of 0.3 gVFA/gVSSfed. Ammonia and phosphate were released during the acidogenic fermentation at concentrations of around 400 mgN/L and 50-60 mgP/L respectively. The low concentration of phosphate is due to the low content of phosphorus in the cellulosic material. However, the co-fermentation of CPS and secondary sludge may increase the concentration of phosphate in the fermentation liquid up to 100 mgP/L, which potentially increase the recovery of struvite precipitation by the addition of Mg(OH)₂ in the dedicated crystallizer after the solid/liquid separation.

Meanwhile the 1.5 m³ SBR was fed with anaerobic supernatant with ammonium concentration of 800-1,000 mgN/L. The applied vNLR was increased up to around 1.7 kgN/ m³ d of which 85% of the ammonium is oxydised to nitrite by ammonium oxidizing bacteria.

During the aerobic phase of the selection SBR, the fermentation liquid after the struvite crystallization was used as source of VFAs. During the operations, the observed VFAs uptake rate increased up to 280 mgCOD/gMLVSS h at 20°C in 10 days, which was in agreement with the decrease of the feast/famine ratio from 0.45 to less than 0.15 min/min. The observed PHA production yield was around 0.42 g of CODPHA g⁻¹ CODVFA, which was comparable with the one reported by previous study (Frison et al., 2015). At the beginning of famine phase the effluent of nitrification reactor was fed to the selection reactor and anoxic conditions were established. In this phase the sole electron acceptor is the nitrite that is denitrified using stored PHA as carbon source. Currently, the combination of the nitrification reactor with the selection SBR allows the removal of around 1.0-1.2 kgN/d via nitrite. Around 600 L of selected biomass from the selection SBR is moved into 1 m³ SBR where PHA accumulation is performed using CPS fermentation liquid fraction under 6-8 spikes of 1 gCOD/L as carbon source. The mixture of VFAs in the carbon source allows to accumulate polymers composed by both polyhydroxybutyrate and polyhydroxyvalerate which improve the final polymer properties. The PHA production yield is 0.40-0.45 g COD_{PHA}/gCOD_{VFA}, while the final content of PHA in the microbial cell is higher than 25%. The potential PHA production around 1 kgPHA per accumulation batch.

Literature

Frison, N., Katsou, E., Malamis, S., Oehmen, A., & Fatone, F. (2015). Development of a novel process integrating the treatment of sludge reject water and the production of polyhydroxyalkanoates (PHAs). *Environmental science & technology*, 49(18), 10877-10885.

S. Malamis, E. Katsou, S. Di Fabio, D. Bolzonella, and F. Fatone, (2013) Biological nutrients removal from the supernatant originating from the anaerobic digestion of the organic fraction of municipal solid waste, *Crit. Rev. Biotechnol.*, 34, 244-257.

Stamatelatos K., Tsagarakis P. (2015). Short-cut enhanced nutrient removal from anaerobic supernatants: pilot scale results and full scale development of the S.C.E.N.A. process. *Sewage Treatment Plants: Economic Evaluation of Innovative Technologies for Energy Efficiency*. IWA Publishing.