

Evaluation of Passive Reduction of Salts and Nitrate from Greenhouse Effluent by Planted Bioreactors

S. Fatehi Pouladi*, B. C. Anderson*, B. Wootton** and L. Rozema***

* Department of Civil Engineering, Queen's University, 58 University Avenue, Kingston K7L 3N6, ON, Canada
(E-mails: 12sfp@queensu.ca; bruce.anderson@queensu.ca)

** Centre for Alternative Wastewater Treatment, Fleming College, 200 Albert St., Lindsay K9V 5E6, ON, Canada
(E-mail: brent.wootton@flemingcollege.ca)

*** Aqua Treatment Technologies, 4250 Fly Road, Campden L0R 1G0, ON, Canada
(E-mail: lrozema@aqua-tt.com)

Abstract

A number of pilot-scale gravel and wood-chip hybrid bioreactors planted with select species, together with unplanted units, were evaluated for their nutrients removal capabilities from the typical greenhouse effluent with high levels of nitrate and salts. The wood-chip bioreactor planted with *Schoenoplectus tabernaemontani* showed better salt reduction management. Two levels of nutrient solution (High and Low Loading: HL/LL) were prepared to simulate the typical characteristics of the greenhouse effluent. The wood-chip bioreactor with *Typha angustifolia* exhibited the highest consistent nutrient treatment with an average nitrate reduction in the LL phase of 88.4% ($28.2 \text{ g N m}^{-3} \text{ media day}^{-1}$) and phosphate reduction of 34.4%. The nitrate reduction in this bioreactor was the highest among the values reported in the literature. The near complete denitrification developed provided a nitrate-limiting environment as evidenced by an average 21.5% sulfate reduction. The distinct increase in the outflow organic carbon (as BOD_5) from the wood chips in the bioreactor planted with *T. angustifolia* appeared to be the key explanation for the efficient denitrification, while the other vegetated bioreactors resulted in 19.0 – 36.5 % nitrate reduction and low outflow BOD_5 near the end of the experiment, indicating carbon limitation in these bioreactors.

Keywords

Denitrification; nitrate; wood-chip bioreactor; greenhouse effluent

INTRODUCTION

The indoor crop production in greenhouses is recognized as an efficient, year-around farming practice, mainly for crop yield and controlled use of resources. The typical effluent generated by greenhouses for food production contains high levels of nitrate, among other problematic constituents (Saxena and Bassi, 2012). Although the greenhouse effluent is typically low in organic carbon concentrations (Prystay and Lo, 2001), the direct discharge of this nutrient-rich solution to the surrounding surface waters has major environmental risks including eutrophication and hypoxia (Gruyer et al., 2013). Recently in Ontario, Canada, new regulations came into effect to help greenhouse growers comply with the environmental standards for managing the effluent from closed-system operations (GNF, 2015). Furthermore, the health implications caused by the high nitrate level in drinking water have resulted in the enforcement of a maximum acceptable concentration for nitrate in drinking water ($10 \text{ mg NO}_3\text{-N L}^{-1}$; Health Canada, 2013).

Moreover, the recirculated greenhouse effluent for repeated irrigation contains salt concentrations that are high enough to damage sensitive crops. In the present experiments, the wood-chip bioreactor planted with *Schoenoplectus tabernaemontani* reduced the greenhouse effluent's conductivity (EC) by a maximum of 15% (average = 7%), and showed higher accumulated Na^+ and Cl^- in the plant's above-ground biomass. The short hydraulic residence time (HRT) and the relatively low salinity levels in the greenhouse effluent, with respect to other phytodesalination studies, were suggested as the factors that led to the insufficient salinity reduction as per the irrigation water quality guidelines (for further details on salt reduction performance, see Fatehi Pouladi et al., 2016).

Denitrification is commonly recognized as a process in which nitrate is reduced to nitrogen gas via

other intermediates. As most of the denitrification is carried out by facultative heterotrophs, the process is strongly dependent on carbon availability (Kadlec and Wallace, 2009). Many on-site subsurface systems designed for treating wastewater with high nitrate concentrations and low organic matter employ wood chips to supply the stream with organic carbon required to facilitate denitrification (e.g. Christianson et al., 2012; Ghane et al., 2015). While other carbon-rich sources have been studied to supplement these treatment systems, wood wastes are known as the best and most commonly used materials for denitrification systems (Bednarek et al., 2014). A meta-analysis of several studies suggested that wood source did not significantly affect the nitrate removal rates in denitrifying beds (Addy et al., 2016), and wood chips in particular were reported elsewhere to provide ideal conditions for denitrifying bacteria (Warneke et al., 2011c).

The different aspects of engineered denitrifying treatment systems, known collectively as denitrifying bioreactors, have recently been investigated in the treatment of diffuse agricultural runoff. The increasing number of recent publications, together with the official inclusion of wood-chip bioreactors in the nutrient reduction strategies of some of the US Midwestern states (Christianson and Schipper, 2016) show the effective applicability of these systems for nitrate reduction. The majority of nitrate removal in similar systems was reported to occur due to heterotrophic denitrification, while the role of other processes such as dissimilatory nitrate reduction to ammonium, anammox and plant uptake were presumed to be relatively low (Warneke et al., 2011a).

Despite the promising results made available in the literature during the past few years, as well as confirmed multi-year longevity and nitrate removal as high as $16.1 \text{ g N m}^{-3} \text{ media day}^{-1}$ for fresh wood chips in test columns (Robertson, 2010) and up to $22 \text{ g N m}^{-3} \text{ media day}^{-1}$ in denitrification beds (Schipper et al., 2010b), the removal rates remain varied among different studies (Addy et al., 2016). In addition, and as mentioned previously, the majority of the published studies on wood-chip bioreactors and their high effectiveness for nitrate management have focused on real or simulated agricultural tile drainage (e.g. Woli et al., 2010; Christianson et al., 2011; David et al., 2016) with $\text{NO}_3\text{-N}$ inflow concentrations typically below 60 mg L^{-1} . The typical greenhouse effluent generated by indoor vegetable and fruit producers, however contains much higher $\text{NO}_3\text{-N}$ concentrations, usually in the range of 200 to 325 mg L^{-1} (Park et al., 2009; Schipper et al., 2010a).

The studies on the performance of wood-chip bioreactors subject to greenhouse effluent are scarce and limited to one greenhouse [glasshouse] located in New Zealand (Schipper et al., 2010a; Warneke et al., 2011b). The denitrification bioreactor (bed) employed at this site resulted in long term nitrate removal between 5 and 10 g N m^{-3} (about 40% N removal) while the nitrate outflow concentrations were not limiting and remained mostly greater than 100 mg N L^{-1} . The system was regarded as being overwhelmed by the high inflow nitrate concentration and large flow rate (Schipper et al., 2010a).

The common design of denitrification beds investigated in the literature consists of underground excavations or trenches filled with organic substrate which receive the nitrogen-rich solution from one end and discharge the treated water from the other end (e.g. Addy et al., 2016), resembling the well-known configuration of horizontal flow constructed wetlands (CWs). However, the performance and efficacy of denitrifying bioreactors designed to operate in vertical flow mode has not been assessed. Most importantly, the low-cost denitrification bioreactors are usually not vegetated due to their specific construction layout under the ground which aims to provide the anaerobic conditions necessary for successful denitrification process. Therefore, the potential effects and contributions of vegetation, if available, has not been discussed in detail. As such, it is not clear how the presence of different plant species in wood-chip bioreactors would influence the microbial activity and available organic matter that are generally considered responsible for efficacy of the systems by facilitating denitrification. Additionally, it has been suggested that those wetland plants found in the area of a

wetland be considered for use in CWs for agricultural wastewater, with *Typha* as the most common species used in Northeastern North America (Rozema et al., 2016).

The objectives of the present study were to investigate the efficiency of the vertical-flow bioreactors in treating the greenhouse effluent, and to compare the influence of multiple plant species on nutrient reduction, with particular focus on inorganic nitrate. The main hypothesis for which the experiments were designed was that hybrid denitrification systems equipped with phytotechnology would enhance the overall treatment performance, primarily due to the potential enhanced biological contributions provided by the plants.

MATERIALS AND METHODS

This study consists of two bioreactor experiments with gravel and wood chips as the media, the phytodesalination performance of which was reported in Fatehi Pouladi et al. (2016). The gravel pilot-scale experiment was conducted at the Centre for Alternative Wastewater Treatment (CAWT) in Lindsay, Ontario, Canada and the wood-chip bioreactors were operated at the laboratory of the Department of Civil Engineering at Queen's University in Kingston, Ontario, Canada. The main objective of the gravel experiment was to evaluate nutrient reduction by the planted bioreactors in absence of an organic-rich substrate, while the wood-chip bioreactors were designed to assess the changes in water quality parameters of the greenhouse effluent by supplying organic carbon from the wood chips in conjunction with the presence of established vegetation.

Each reactor was built using a 220 L open-top barrel (56 cm in diameter, 90 cm in height) filled with a single 80 cm layer of the media substrate. The influent used to feed the bioreactors was synthesized in the laboratory to mimic the typical characteristics of the greenhouse effluent. One perforated PVC grid on the surface of the media distributed the influent evenly over each reactor's surface, and another duplicate grid was placed at the bottom of the barrel to collect the treated water and direct it to the outlet pipe for discharge and sample collection. The outlet pipe created saturated conditions with the reactors operating in vertical down-flow (top-bottom) mode providing low levels of dissolved oxygen within the unit. The synthetic influent (continuous flow rate: 30 L day⁻¹) was made using commercial fertilizer, NaCl and Na₂SO₄ in water. The HRT was approximately 3.3 days for the gravel bioreactors (assumed gravel porosity: 0.5) and 3.7 days for the wood-chip bioreactors with the measured porosity of 0.58 (Fatehi Pouladi et al., 2016).

The five vegetated gravel reactors together with one unplanted (control) unit were housed in a greenhouse with natural sunlight and ambient temperature range of 15 to 25 °C. The substrate media was 9.5 mm (3/8 in) gravel with no sand or fines. In the wood-chip bioreactors, one unplanted unit and a maximum of four vegetated reactors were operated under a metal halide grow light set to a continuous 16/8 hour on/off cycle per 24 hours (average daytime ambient temperature: 23.6 °C). The wood-chip media was composed of 2-3 cm long grains and was sourced from an agricultural facility in Quebec, Canada. The planted bioreactors in both experiments contained approximately similar cover density for various plants, with about 7 to 8 plants per barrel and 30 plants m⁻² in cover density. Two levels of nutrient loading were created for wood-chip bioreactors' influent (Table 1). This was done to account for the low (Low Loading: LL) and high (High Loading: HL) ends of nitrate concentration ranges in the typical greenhouse effluent. A total of seven plant species were tested in the experiments including softstem bulrush (*Schoenoplectus tabernaemontani* C.C. Gmel. Palla, abbreviated as *S. taber.* in the following tables), big bluestem (*Andropogon gerardii* Vitman), narrowleaf cattail (*Typha angustifolia* L.), Canada wildrye (*Elymus canadensis* L.), switchgrass (*Panicum virgatum* L.), prairie cordgrass (*Spartina pectinata* Bosc ex Link) and saltgrass (*Distichlis spicata* L. Greene). Table 2 summarizes the active species for each experiment and their timelines.

Grab samples were collected from the influent and the discharged solution from the bioreactors for water quality analysis according to Standard Methods (APHA et al., 2005). The gravel experiment data for the first week of operation were omitted as the values were considered unusually low. The change in concentration was calculated as $R = 100 \times (\Delta C) / C_i$, where R (%) is the percentage removal of the target constituent, ΔC (mg L^{-1}) is the difference between the constituent's averaged concentration in the inflow (C_i , mg L^{-1}) and that in the outflow after treatment (C_e , mg L^{-1}) at the point of discharge. As the effect of evapotranspiration on concentration change was demonstrated to be relatively small (1.9%, Fatehi Pouladi et al., 2016), a mass balance for a target constituent inside the reactor can be defined as $\Delta M / \Delta t = Q \times \Delta C$, where $\Delta M / \Delta t$ (mg day^{-1}) is the mass removal rate of the target constituent and Q (L day^{-1}) is the incoming flow rate. The nitrate mass removal rate was defined according to $dm_{\text{NO}_3\text{-N}} = Q \times \Delta C / V_{\text{media}}$, where $dm_{\text{NO}_3\text{-N}}$ ($\text{g day}^{-1} \text{m}^{-3}$) is the nitrate mass removal rate and V_{media} (m^3) is the volume of the bioreactor filled with wood-chip media. The nitrate removal rates were defined as $r_{\text{NO}_3\text{-N}} = \Delta C / \text{HRT}$, where $r_{\text{NO}_3\text{-N}}$ ($\text{mg L}^{-1} \text{day}^{-1}$) is the average zero-order nitrate removal rate over the operation period of each experiment, HRT (day) is the estimated hydraulic residence time of each wood-chip bioreactor (3.7 days), and $k_{\text{NO}_3\text{-N}} = \ln(C_i / C_e) / \text{HRT}$, where $k_{\text{NO}_3\text{-N}}$ (day^{-1}) is the average first-order nitrate removal rate during the experiments' operation.

Using XLStat software (©Addinsoft), one-way ANOVA, the Tukey's and Dunnett's methods were employed for statistical analysis in order to identify significant differences between the reactors (difference reported significant when $p\text{-value} < 0.05$). The water quality sampling from the wood-chip bioreactors was delayed for 70 and 27 days in Phase 1 and Phase 2 of the HL experiment respectively to allow for acclimation within the bioreactors, whereas the LL component started immediately after Phase 2 as the bioreactors had been in operation for over one year.

Table 1. The active plant species used in each experimental period. Highlighted cells represent the reactors in use.

Reactor type	Phase	Operation period		Operated reactors							
		From	To	<i>S. taber.</i>	<i>A. gerardii</i>	<i>T. angustifolia</i>	<i>E. canadensis</i>	<i>P. virgatum</i>	<i>S. pectinata</i>	<i>D. spicata</i>	Control
Gravel	-	12 Mar 2014	02 Jul 2014								
	Phase 1	01 Oct 2014	07 Apr 2015								
Wood-chip HL ¹	Interim	08 Apr 2015	11 Jun 2015								
	Phase 2	12 Jun 2015	23 Oct 2015								
Wood-chip LL ²	-	24 Oct 2015	17 May 2016								

¹High Loading, ²Low Loading

RESULTS AND DISCUSSION

The planted gravel bioreactors did not result in any significantly better performance compared to the control gravel unit (Table 2, Fig. 1). The overall zero nitrate removal in these units was expected as the gravel substrate did not provide the organic carbon required to facilitate the microbial denitrification, despite the average BOD₅ level of about 2 times higher in the planted units.

In the HL period of the wood-chip experiment, the NO₃-N concentrations in the outflow of the *T. angustifolia* and *S. tabernaemontani* wood-chip units were significantly different from the unplanted bioreactor ($p\text{-value} < 0.05$, Table 3, Fig. 2-A), demonstrating average reductions of 38.6% and 55.3%

respectively. The *S. tabernaemontani* bioreactor, however, showed consistently higher NO₃-N outflow concentrations as the experiment continued in time until the end of the high-loading phase. The bioreactors in this phase showed minimal PO₄-P reductions (max. 9.2%), while *T. angustifolia* exhibited lower outflow concentrations as the plant became better established in the summer of 2015 (Fig. 2-B).

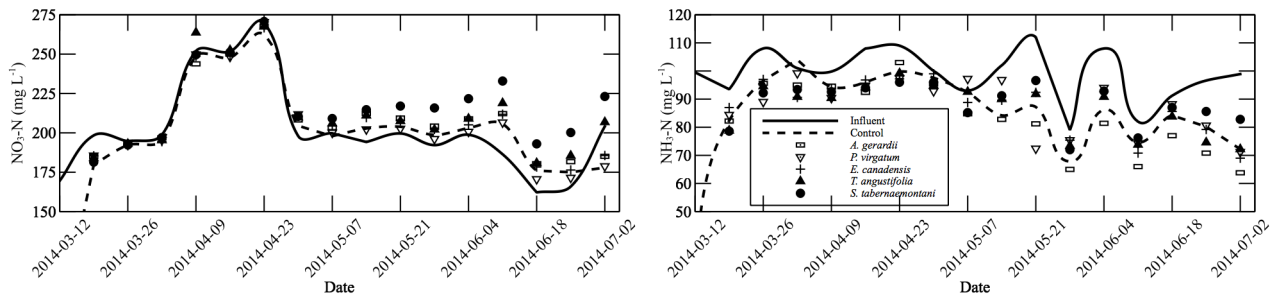


Figure 1. Temporal trends of nutrient concentrations in gravel reactors.

As the operation of the wood-chip bioreactors transitioned into the next phase, treating low-load influent, the *T. angustifolia* bioreactor was the only vegetated unit that demonstrated significantly different results for most of the water quality parameters, except for NO₂-N and pH, in comparison with the control unit (Table 4, Fig. 2-C and D and Fig. 3). This planted unit resulted in average NO₃-N, PO₄-P and SO₄-S reductions of 88.4%, 34.4% and 21.5% respectively. Very high NO₃-N reductions promoted by this species (minimum outflow concentration < 1 mg L⁻¹) indicated successful denitrification of up to 99% and 6.2 g NO₃-N day⁻¹ reductions which were coupled with sudden increases in BOD₅ values (Fig. 4-A to C).

As the nitrate ions were almost completely reduced starting in February 2016 (Fig. 2-C), sulfate concentrations were also reduced (average 27.9 mg S L⁻¹) indicating that the anaerobic environment and absence of nitrate ions had provided favourable conditions for sulfate reducing bacteria. This was evident by the sulphide odour in proximity of the bioreactor, together with the change of the outflow water colour which turned murky with apparent white to grey particles accumulated in the drainage basin (potential precipitated sulphide). The near complete nitrate removal followed by reductions in sulfate concentrations in the wood-chip bioreactors might be favourable for the greenhouse industry as the small levels of nutrients and salts enhance the potential of the greenhouse effluent for discharge and reuse respectively. The outflow solution's colour change and the precipitates may however be considered as drawbacks to potential water reuse.

The development of sulfate reducing conditions after complete denitrification in a streambed bioreactor has been previously reported (Shih et al., 2011), where the authors showed when sulfate reducing conditions were active, concentrations of methyl mercury, a bio-accumulative toxicant, increased. The authors further suggested that maintaining a minimum residual NO₃-N concentration of 0.5 mg L⁻¹ would suppress the production of methylmercury. In our study, however, sulfate reduction in *T. angustifolia* bioreactor was still evident when the outflow NO₃-N concentrations were larger than 1.0 mg L⁻¹. In greenhouse settings, it can be argued that greenhouse effluent is less susceptible to mercury bound in the soil minerals and solids in agricultural farmlands and fields, which would be carried in the agricultural tile runoff before reaching the bioreactors. The risk of the methylation of the mercury entering the system via other pathways (e.g. wood chips from contaminated trees and water drawn from lakes that contain mercury from atmospheric deposition) should however be considered in the bioreactors.

The alkalinity level of the outflow solution was significantly higher in the *T. angustifolia* unit with

an approximately 183-fold increase from the inflow. The connection between the alkalinity and denitrification in the wood-chip bioreactors, due to the production of bicarbonate in heterotrophic denitrification, and the application of the measured alkalinity as an indicator for bioreactors' performance with particular respect to N₂O formation was recently studied (Jones and Kult, 2016). The direct proportionality of the outflow solution's alkalinity to nitrate reductions for all the bioreactors throughout the entire operation of wood-chip reactors is shown in Fig. 4-D. The percentage removal of nitrate in *T. angustifolia* bioreactor (Fig. 4-A) had a rapid enhancement shortly after the beginning of the LL phase. This sudden increase is expected since the smaller nitrate concentrations in the inflow during the LL phase should result in higher percentage removal values assuming no significant change in the reduction capacity of the system. In addition, the mass-based reductions (Fig. 4-B) shows higher nitrate mass removal rates after the LL period started (average HL: 3.6, LL: 5.4, max total duration: 6.2, min: 2.3 g NO₃-N day⁻¹). The increased denitrification rate observed in this unit was coupled with a rapid spike in the outflow BOD₅ of the reactor (Fig. 4-C). The results of the wood-chip bioreactors show that during the HL phase, all the units were overloaded by excessive levels of nitrate concentrations, and the bioreactors were only able to reduce nitrate between 30% to 55%, likely as a result of limited biologically available organics from the wood chips and the plants below-ground biomass.

The decrease in inflow nitrate concentrations (LL phase) then coincided with very high levels of organic carbon in the form of BOD₅ that were made available, likely as a result of the vigorous growth of *T. angustifolia* and the microbial contribution of the plant's rhizosphere in contact with the wood chips, together with the fast decay of the dead plant's biomass inside the bioreactor. The sudden increase in the natural supply of organic matter in this bioreactor was most likely the active driver in the almost complete denitrification, where the incoming nitrate concentration was the limiting factor in the reaction. The active growth of *T. angustifolia* can also explain the phosphate uptake by the species that stood out from the rest of the units (Fig. 2-D and 3).

Table 2. Average parameters of the inflow (influent) and outflow solutions in gravel bioreactors. SD values are given in brackets.

Parameter (unit)	Influent		Control	Planted Reactors
NO ₃ -N (mg L ⁻¹)	204.1 [28.4]	Out ¹	204.5 [25.6]	210.4 [4.2]
		Red. ²	--	--
NO ₂ -N (mg L ⁻¹)	0.2 [0.3]	Out ¹	5.2 [3.1]	4.2 [0.9]
		Red. ²	--	--
NH ₃ -N (mg L ⁻¹)	98.9 [9.2]	Out ¹	87.5 [10.2]	86.7 [1.8]
		Red. ²	11.5 %	12.3 %
TKN (mg L ⁻¹)	116.2 [0.9]	Out ¹	98.7 [4.4]	101.4 [2.9]
		Red. ²	15.1 %	12.7 %
PO ₄ -P (mg L ⁻¹)	43.9 [4.0]	Out ¹	36.8 [3.4]	37.6 [0.5]
		Red. ²	16.2 %	14.4 %
SO ₄ -S (mg L ⁻¹)	124.4 [6.0]	Out ¹	124.2 [8.2]	127.8 [3.4]
		Red. ²	0.2 %	--
BOD ₅ (mg L ⁻¹)	2.0 [1.1]		5.4 [4.5]	11.1 [3.3]
COD (mg L ⁻¹)	34.7 [4.6]	Out ¹	33.6 [1.3]	33.6 [1.8]
pH	7.3 [0.4]		7.2 [0.2]	7.2 [0.1]

¹The measured constituent in the outflow solution. ²Reduction with respect to the influent.

Table 3. Average parameters of the inflow (influent) and outflow solutions in wood-chip bioreactors receiving the synthetic greenhouse HL effluent. SD values are given in brackets.

Parameter (unit)	Influent		Control	<i>E. canadensis</i>	<i>P. virgatum</i>	<i>S. taber.</i>	<i>S. pectinata</i>	<i>D. spicata</i>	<i>T. angustifolia</i>
NO ₃ -N (mg L ⁻¹)	307.3 [9.9]	Out ¹	209.6 [73.8]	172.8 [31.4]	207.4 [20.5]	137.4 [73.0]*	202.9 [33.3]	214.4 [5.2]	188.7 [33.1]*
		Red. ²	31.8 %	43.8 %	32.5 %	55.3 %	34.0 %	30.2 %	38.6 %
NO ₂ -N (mg L ⁻¹)	1.8 [0.6]	Out ¹	3.2 [0.9]	6.3 [2.7]	2.6 [0.5]	2.1 [0.8]	1.8 [0.8]	2.0 [0.7]	4.9 [4.9]
		Red. ²	--	--	--	--	--	--	--
NH ₃ -N (mg L ⁻¹)	8.0 [0.8]	Out ¹	6.4 [2.6]	5.1 [1.1]	5.8 [1.3]	8.1 [5.0]	3.1 [3.1]	8.6 [4.3]	8.4 [4.9]
		Red. ²	20.0 %	36.3 %	27.5 %	--	61.3 %	--	--
TKN (mg L ⁻¹)	9.3 [1.8]	Out ¹	8.2 [1.6]	8.5 [1.2]	8.6 [0.7]	12.3 [3.8]	5.0 [2.9]	11.3 [2.9]	10.9 [4.8]
		Red. ²	11.8 %	8.6 %	7.5 %	--	46.2 %	--	--
PO ₄ -P (mg L ⁻¹)	26.2 [3.5]	Out ¹	25.7 [3.3]	24.3 [1.6]	24.9 [2.4]	25.1 [3.3]	23.8 [0.5]	25.7 [0.5]	24.4 [4.2]
		Red. ²	1.9 %	7.3 %	5.0 %	4.2 %	9.2 %	1.9 %	6.9 %
SO ₄ -S (mg L ⁻¹)	131.0 [4.1]	Out ¹	132.4 [4.0]	131.7 [2.3]	132.7 [1.1]	130.4 [2.9]	134.4 [2.7]	130.6 [3.2]	136.2 [4.4]
		Red. ²	--	--	--	0.5 %	--	0.3 %	--
Alk. ³ (mg L ⁻¹)	8.6 [3.9]		334.3 [241.3]	428.3 [80.2]	341.4 [56.2]	581.1 [237.7]	349.8 [125.5]	323.5 [41.2]	427.7 [94.6]
BOD ₅ (mg L ⁻¹)	2.8 [1.3]	Out ¹	12.1 [4.6]	11.0 [4.4]	16.0 [6.4]	15.7 [8.9]	9.5 [7.7]	13.8 [3.3]	14.4 [6.4]
COD (mg L ⁻¹)	32.6 [11.0]		83.5 [65.7]	80.5 [28.3]	110.3 [59.7]	130.0 [54.0]	50.5 [20.6]	70.9 [8.1]	75.9 [22.7]
pH	5.5 [0.5]		7.4 [0.2]	7.3 [0.2]	7.3 [0.2]	7.2 [0.2]	7.3 [0.1]	7.4 [0.1]	7.3 [0.2]

¹The measured constituent in the outflow solution. ²Reduction with respect to the influent. ³Alkalinity as CaCO₃ to pH 4.5. * marks the data with significant difference from the control reactor (*p*-value < 0.05).

Table 4. Average parameters of the inflow (influent) and outflow solutions in wood-chip bioreactors receiving the synthetic greenhouse LL effluent. SD values are given in brackets.

Parameter (unit)	Influent		Control	<i>S. taber.</i>	<i>S. pectinata</i>	<i>D. spicata</i>	<i>T. angustifolia</i>
NO ₃ -N (mg L ⁻¹)	202.2 [4.9]	Out ¹	153.0 [4.6]	163.8 [6.0]	129.2 [9.4]	128.3 [7.9]	23.4 [34.9]*
		Red. ²	24.3 %	19.0 %	36.1 %	36.5 %	88.4 %
NO ₂ -N (mg L ⁻¹)	1.2 [0.4]	Out ¹	1.4 [0.9]	1.1 [0.2]	1.1 [0.4]	1.0 [0.1]	1.1 [0.4]
		Red. ²	--	8.3 %	8.3 %	16.7 %	8.3 %
NH ₃ -N (mg L ⁻¹)	5.5 [0.3]	Out ¹	0.5 [0.8]	0.9 [0.5]	0.0 [0.0]	0.2 [0.1]	4.4 [5.3]*
		Red. ²	90.9 %	83.6 %	100.0 %	96.4 %	20.0 %
TKN (mg L ⁻¹)	6.6 [0.9]	Out ¹	1.8 [0.8]	2.0 [0.8]	1.4 [0.4]	2.2 [0.4]	8.3 [5.5]*
		Red. ²	72.7 %	69.7 %	78.8 %	66.7 %	--
PO ₄ -P (mg L ⁻¹)	16.0 [1.3]	Out ¹	16.9 [2.2]	17.5 [2.4]	16.3 [2.1]	17.5 [2.3]	10.5 [1.2]*
		Red. ²	--	--	--	--	34.4 %
SO ₄ -S (mg L ⁻¹)	129.6 [4.0]	Out ¹	132.3 [4.5]	132.7 [6.7]	131.6 [3.4]	131.5 [2.4]	101.7 [25.5]*
		Red. ²	--	--	--	--	21.5 %
Alk. ³ (mg L ⁻¹)	3.9 [1.4]		155.5 [10.9]	134.8 [14.4]	231.3 [38.8]	243.3 [25.2]	717.1 [177.5]*
BOD ₅ (mg L ⁻¹)	3.1 [1.4]	Out ¹	5.2 [3.3]	3.8 [1.4]	2.6 [0.9]	4.1 [1.7]	50.4 [31.0]*
COD (mg L ⁻¹)	15.3 [3.0]		30.5 [3.8]	36.6 [3.2]	24.5 [3.4]	51.6 [3.3]	181.6 [77.0]*
pH	5.1 [0.6]		7.4 [0.0]	7.1 [0.1]*	7.5 [0.0]	7.3 [0.1]	7.4 [0.1]

¹The measured constituent in the outflow solution. ²Reduction with respect to the influent.

³Alkalinity as CaCO₃ to pH 4.5. * marks the data with significant difference from the control reactor (*p*-value < 0.05).

Table 5. Average NO₃-N removal rates, calculated from the data points during each experiment's operation time in wood-chip bioreactors. SD values are given in brackets.

	dm_{NO_3-N}		r_{NO_3-N}		k_{NO_3-N}	
	(g m ⁻³ media day ⁻¹)		(mg L ⁻¹ day ⁻¹)		(day ⁻¹)	
	Mass removal rate		Zero-order removal rate		1 st -order removal rate	
	HL ¹	LL ²	HL ¹	LL ²	HL ¹	LL ²
<i>T. angustifolia</i>	18.7 [5.6]	28.2 [5.5]	32.1 [9.6]	48.3 [9.4]	0.14 [0.05]	1.04 [0.52]
Control	15.4 [12.3]	7.8 [0.8]	26.4 [21.0]	13.3 [1.3]	0.17 [0.27]	0.08 [0.01]

¹High Loading, ²Low Loading

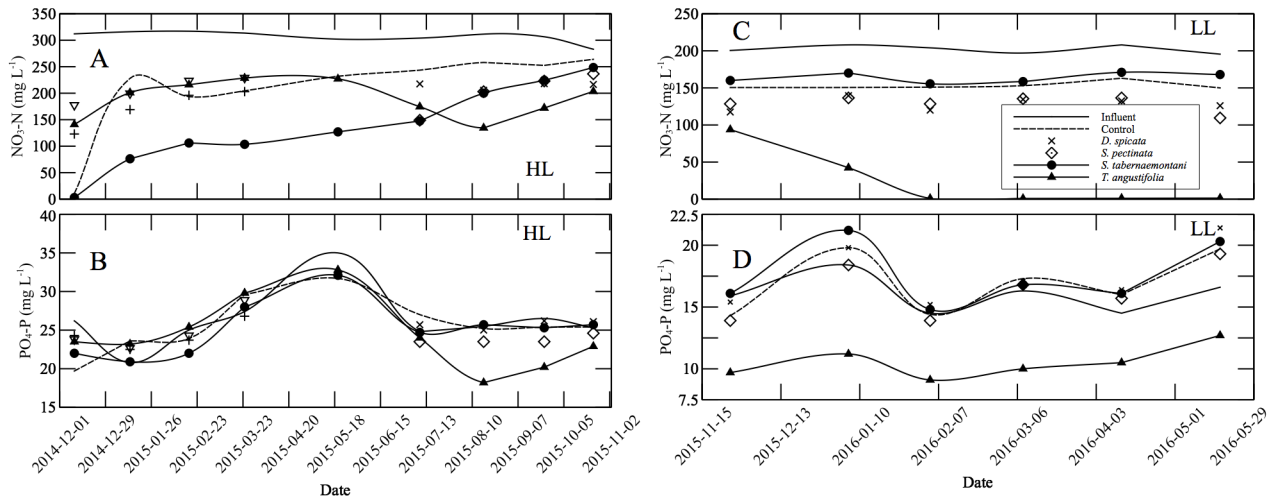


Figure 2. Temporal trends of nutrient concentrations in wood-chip bioreactors (left: HL; right: LL)

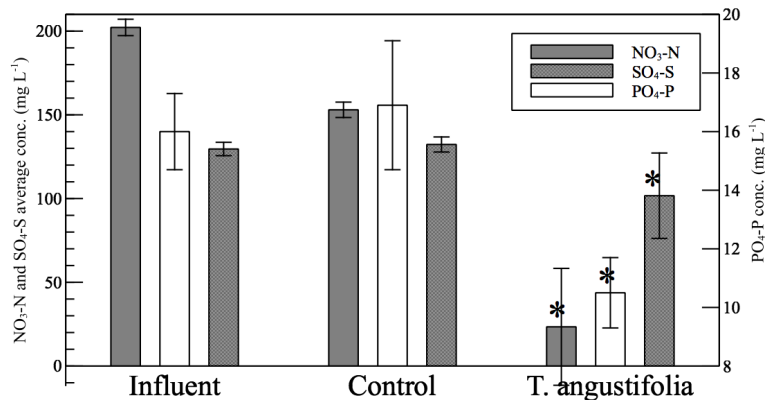


Figure 3. Average performance of the wood-chip bioreactor planted with *T. angustifolia*. Error bars: \pm SD and asterisk (*): significant difference in comparison with the unplanted reactor (p -value < 0.05).

Over the total operation period of the wood-chip experiment (HL and LL phases), the bioreactor containing *T. angustifolia* resulted in an average nitrate removal of 22.5 ± 7.3 g N m⁻³ media day⁻¹, while the average removal amounted to 28.2 ± 5.5 g N m⁻³ media day⁻¹ during the LL phase (Table 5). This observed reduction rate is over 25% greater than the highest previously reported rate of 22 g N m⁻³ media day⁻¹ (Robertson et al., 2000; Schipper et al., 2010b). *S. pectinata* and *D. spicata* resulted in reductions of 11.5 ± 1.1 and 11.7 ± 1.2 g N m⁻³ media day⁻¹ in the LL phase and 15.5 ± 6.2 and 13.7 ± 2.2 g N m⁻³ media day⁻¹ in the HL phase. As the nitrate removal performance of all the bioreactors except for *T. angustifolia* decreased in time, this species demonstrated beneficial capacity of enhancing the denitrification efficiency in time.

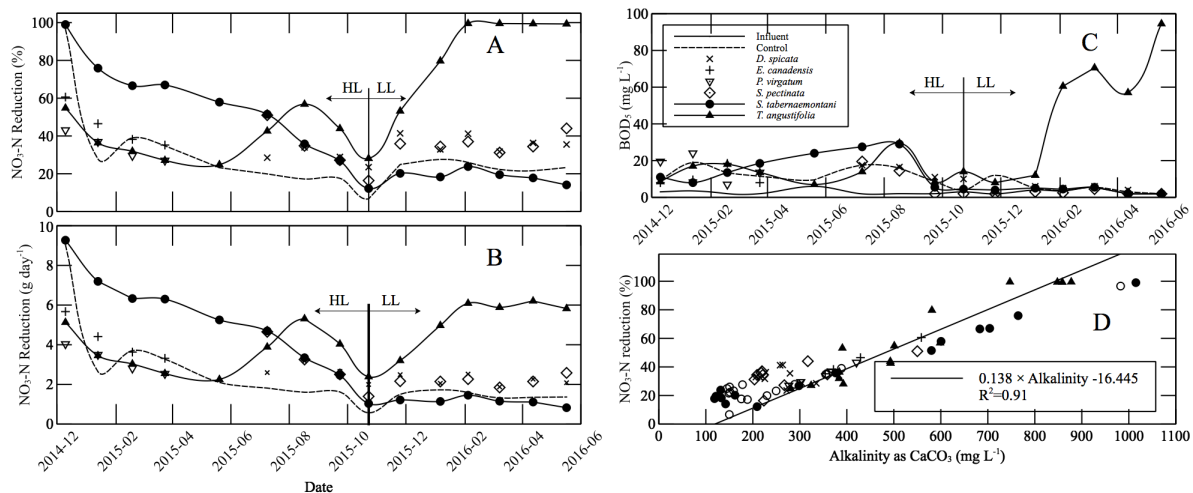


Figure 4. Performance parameters of wood-chip bioreactors during the total operation time.

CONCLUSIONS

The wood-chip denitrifying bioreactor planted with *T. angustifolia* showed consistent nitrate removal with average reduction of $22.5 \text{ g N m}^{-3} \text{ media day}^{-1}$ and up to 99% treatment. The contributions provided by this species in the wood-chip bioreactor resulted in very high denitrification rates while nitrate concentration was the limiting factor in the LL phase. As with similar denitrification bioreactors with near complete nitrate removal, sulfate reduction and production of sulfide compounds were evident which lead to the need for further assessment of the system for potential methylmercury formation.

REFERENCES

- Addy, K., Gold, A.J., Christianson, L.E., David, M.B., Schipper, L.A., Ratigan, N.A., 2016. Denitrifying bioreactors for nitrate removal: A meta-analysis. *Journal of Environmental Quality*, **45**(3), 873-881.
- APHA, 2005. *Standard Methods for the Examination of Water and Wastewater*, 21st edn., American Public Health Association/American Water Works Association/Water Environment Federation, Washington DC, USA.
- Bednarek, A., Szklarek, S., Zalewski, M., 2014. Nitrogen pollution removal from areas of intensive farming—comparison of various denitrification biotechnologies. *Ecohydrology & Hydrobiology*, **14**(2), 132-141.
- Christianson, L.E., Bhandari, A., Helmers, M.J., Kult, K.J., Sutphin, T., Wolf, R., 2012. Performance evaluation of four field-scale agricultural drainage denitrification bioreactors in Iowa. *Transactions of the ASABE*, **55**(6), 2163-2174.
- Christianson, L.E., Hanly, J.A., Hedley, M.J., 2011. Optimized denitrification bioreactor treatment through simulated drainage containment. *Agricultural Water Management*, **99**(1), 85-92.
- Christianson, L.E., Schipper, L.A., 2016. Moving denitrifying bioreactors beyond proof of concept: Introduction to the special section. *Journal of Environmental Quality*, **45**(3), 757-761.
- David, M.B., Gentry, L.E., Cooke, R.A., Herbstritt, S.M., 2016. Temperature and substrate control woodchip bioreactor performance in reducing tile nitrate loads in east-central Illinois. *Journal of Environmental Quality*, **45**(3), 822-829.
- Fatehi Pouladi, S., Anderson, B.C., Wootton, B., Rozema, L., 2016. Evaluation of phytodesalination potential of vegetated bioreactors treating greenhouse effluent. *Water*, **8**(6), 233.
- Ghane, E., Fausey, N.R., Brown, L.C., 2015. Modeling nitrate removal in a denitrification bed. *Water*

Research, **71**, 294–305.

- GNF, 2015. Greenhouse Nutrient Feedwater e-Law under Nutrient Management Act, 2002, Ontario Regulation 300/14, Ontario, Canada. <https://www.ontario.ca/laws/regulation/140300> (accessed 20 June 2016).
- Gruyer, N., Dorais, M., Alsanius, B.W., Zagury, G.J., 2013. Simultaneous removal of nitrate and sulfate from greenhouse wastewater by constructed wetlands. *Journal of Environmental Quality*, **42**(4), 1256–1266.
- Health Canada, 2013. Guidelines for Canadian Drinking Water Quality: Guideline Technical Document - Nitrate and Nitrite. Ottawa, Ontario, Canada. <http://healthycanadians.gc.ca/publications/healthy-living-vie-saine/water-nitrate-nitrite-eau/alt/water-nitrate-nitrite-eau-eng.pdf> (accessed 20 June 2016).
- Jones, C.S., Kult, K.J., 2016. Use alkalinity monitoring to optimize bioreactor performance. *Journal of Environmental Quality*, **45**(3), 855–865.
- Kadlec, R.H., Wallace, S., 2009. *Treatment Wetlands*, 2nd edn., CRC Press, Taylor & Francis Group, Boca Raton, FL, USA.
- Park, J.B.K., Craggs, R.J., Sukias, J.P.S., 2009. Removal of nitrate and phosphorus from hydroponic wastewater using a hybrid denitrification filter (HDF). *Bioresource Technology*, **100**(13), 3175–3179.
- Prystay, W., Lo, K.V., 2001. Treatment of greenhouse wastewater using constructed wetlands. *Journal of Environmental Science and Health, Part B*, **36**(3), 341–353.
- Robertson, W.D., 2010. Nitrate removal rates in woodchip media of varying age. *Ecological Engineering*, **36**(11), 1581–1587.
- Robertson, W.D., Blowes, D.W., Ptacek, C.J., Cherry, J.A., 2000. Long-term performance of in situ reactive barriers for nitrate remediation. *Groundwater*, **38**(5), 689–695.
- Rozema, R.E., VanderZaag, C.A., Wood, D.J., Drizo, A., Zheng, Y., Madani, A., Gordon, J.R., 2016. Constructed wetlands for agricultural wastewater treatment in Northeastern North America: A review. *Water*, **8**(5), 173.
- Saxena, P., Bassi, A., 2013. Removal of nutrients from hydroponic greenhouse effluent by alkali precipitation and algae cultivation method. *Journal of Chemical Technology & Biotechnology*, **88**(5), 858–863.
- Schipper, L.A., Cameron, S.C., Warneke, S., 2010a. Nitrate removal from three different effluents using large-scale denitrification beds. *Ecological Engineering*, **36**(11), 1552–1557.
- Schipper, L.A., Robertson, W.D., Gold, A.J., Jaynes, D.B., Cameron, S.C., 2010b. Denitrifying bioreactors—An approach for reducing nitrate loads to receiving waters. *Ecological Engineering*, **36**(11), 1532–1543.
- Shih, R., Robertson, W.D., Schiff, S.L., Rudolph, D.L., 2011. Nitrate controls methyl mercury production in a streambed bioreactor. *Journal of Environmental Quality*, **40**(5), 1586–1592.
- Warneke, S., Schipper, L.A., Bruesewitz, D.A., Baisden, W.T., 2011a. A comparison of different approaches for measuring denitrification rates in a nitrate removing bioreactor. *Water Research*, **45**(14), 4141–4151.
- Warneke, S., Schipper, L.A., Bruesewitz, D.A., McDonald, I., Cameron, S., 2011b. Rates, controls and potential adverse effects of nitrate removal in a denitrification bed. *Ecological Engineering*, **37**(3), 511–522.
- Warneke, S., Schipper, L.A., Matiasek, M.G., Scow, K.M., Cameron, S., Bruesewitz, D.A., McDonald, I.R., 2011c. Nitrate removal, communities of denitrifiers and adverse effects in different carbon substrates for use in denitrification beds. *Water Research*, **45**(17), 5463–5475.
- Woli, K.P., David, M.B., Cooke, R.A., McIsaac, G.F., Mitchell, C.A., 2010. Nitrogen balance in and export from agricultural fields associated with controlled drainage systems and denitrifying bioreactors. *Ecological Engineering*, **36**(11), 1558–1566.